
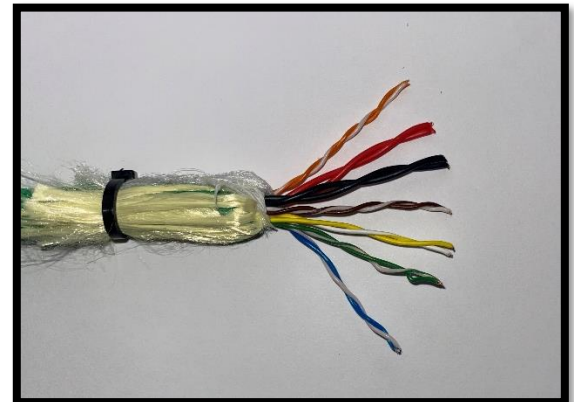


- **SMALL DIAMETER & LIGHTWEIGHT**
- **7 TWISTED PAIR CABLE**
- **NEUTRALLY BUOYANT**
- **MEDIUM GREEN**
- **RUGGED DESIGN**
- **ROV / INSTRUMENT CABLE**

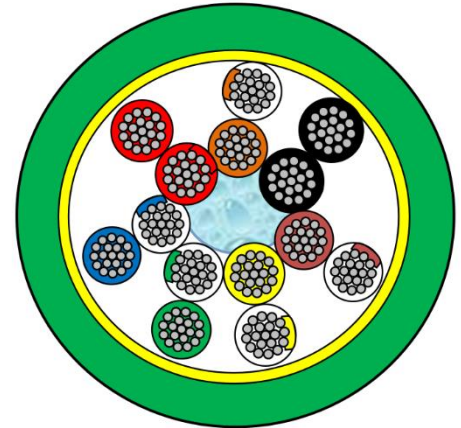

MECHANICAL:

Strength Member..... Braided Kevlar
 Breaking Strength..... 500 lbs. (227 kg)
 Jacket Material..... Green Foam Polyurethane
 Outer Diameter..... ~0.38 in. (9.5 mm)
 Weight per 100 ft in air..... 4.18 lbs. (1.9 kg.)
 Weight per 100 ft in water..... -.35 lbs (-0.16 kg.)
 Weight per 100 ft in seawater..... -.5 lbs (-0.236 kg.)
 Operating Temperature..... -40°C to 80°C
 Min Recommended Bend Radius..... >4 in. (10.2 cm.)

ELECTRICAL:

Power Conductor Voltage Rating..... 500V
 Data Conductor Voltage Ratings..... 300V

Conductors

- Power Conductors
 - #24 AWG TP Red, Red
 - #24 AWG TP Black, Black
- Data Conductors
 - #26 AWG TP Orange, Orange/White
 - #26 AWG TP Brown, Brown/White
 - #26 AWG TP Blue, Blue/White
 - #26 AWG TP Green, Green/White
 - #26 AWG TP Yellow, Yellow/White